

# DB-LED (WW)



## GENERAL

DB-LED (WW)  
 Article number \_\_\_\_\_ 10102402  
 Category \_\_\_\_\_ integrated  
 Light source \_\_\_\_\_ LED  
 Color changing \_\_\_\_\_ no  
 Warranty \_\_\_\_\_ 5 years

## DIMENSIONS

Length \_\_\_\_\_ -  
 Width \_\_\_\_\_ -  
 Height \_\_\_\_\_ 32 mm / 1.26"  
 Diameter \_\_\_\_\_ 22 mm / 0.87"  
 Total height \_\_\_\_\_ -  
 Recess depth \_\_\_\_\_ 50 mm / 1.97"

## ELECTRONICS

Voltage \_\_\_\_\_ 12V AC  
 Output \_\_\_\_\_ 0.50 Watt  
 VA \_\_\_\_\_ 0.50  
 Power factor \_\_\_\_\_ 1.00  
 Light source \_\_\_\_\_ 6x SMD-LED 0.6W  
 Lifetime \_\_\_\_\_ 25000 hours  
 Dimmable \_\_\_\_\_ no  
 Length of cable lead \_\_\_\_\_ 600 mm / 24"

## LIGHT SPECIFICATIONS

Color temperature \_\_\_\_\_ 2850 K  
 CRI (RA) \_\_\_\_\_ 94  
 Luminous intensity \_\_\_\_\_ 6.40 Cd  
 Light beam 0-180 \_\_\_\_\_ 124°  
 Light beam 90-270 \_\_\_\_\_ 124°  
 Net luminous flux \_\_\_\_\_ 25 lumen  
 Luminous efficiency \_\_\_\_\_ 50 lumenwatt

## MATERIAL

Ring Plate \_\_\_\_\_ -  
 Lens \_\_\_\_\_ polycarbonate  
 Exterior \_\_\_\_\_ polycarbonate  
 Easy Lock included \_\_\_\_\_ yes  
 Installation hardware included \_\_\_\_\_ yes

## AVAILABLE PRODUCT COLORS



-

## AVAILABLE ACCESSORIES

-

## PROTECTION RATING

IP : 67

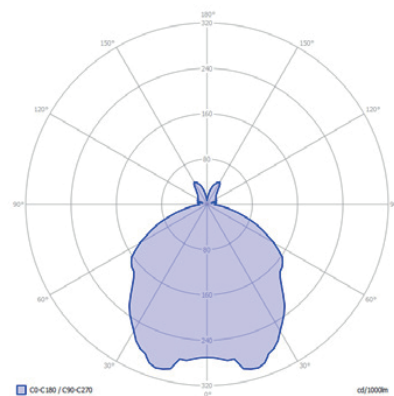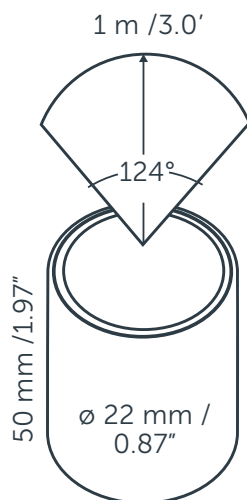

ILLUMINANCE - CONE OF LIGHT		
CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
6	3.76	1.0
3	6.02	1.6
1	8.28	2.2
1	10.53	2.8
1	12.79	3.4
0	15.05	4.0

Beam angle (0-180°) (90-270°): 124°  
edge illuminance is 1/2 of Centre beam

12 VOLT



**ENERGY**  
in-lite design b.v.  
DB-LED (WW)

A  
B  
C  
D  
E  
F  
G

**1**  
kWh/1000h

2019/2015

in-lite®