

# EVO HYDE 180

## GENERAL

EVO HYDE 180  
 Article number: 10250200  
 Category: indirect  
 Light source: LED  
 Color changing: no  
 Warranty: 5 years

## DIMENSIONS

Length: 180 mm / 7.09"  
 Width: 16 mm / 0.63"  
 Height: 22 mm / 0.87"  
 Diameter: -  
 Total height: -  
 Recess depth: -

## ELECTRONICS

Voltage: 12V AC  
 Output: 0.50 Watt  
 VA: 0.60  
 Power factor: 0.83  
 Light source: 12x SMD-LED 0.06W  
 Lifetime: 25000 hours  
 Dimmable: no  
 Length of cable lead: 600 mm / 24"

## LIGHT SPECIFICATIONS

Color temperature: 2950 K  
 CRI (RA): 95  
 Luminous intensity: 16.00 Cd  
 Light beam 0-180: 64°  
 Light beam 90-270: 91°  
 Net luminous flux: 25 lumen  
 Luminous efficiency: 50 lumenwatt

## MATERIAL

Ring Plate: -  
 Lens: acrylic (PMMA)  
 Exterior: aluminum  
 Easy Lock included: yes  
 Installation hardware included: yes

## AVAILABLE PRODUCT COLORS

■ Black



## AVAILABLE ACCESSORIES

FIX 3, FIX 4

## PROTECTION RATING

IP : 53

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance
[m]	[ft]	[m]	[ft]	[m]	[ft]	[lux]
0.8	2.5	1.0	3.1	1.5	5.0	28.4
1.0	3.3	1.3	4.1	2.0	6.7	16.0
1.3	4.1	1.6	5.1	2.6	8.4	10.2
1.5	4.9	1.9	6.2	3.1	10.0	7.1
1.8	5.7	2.2	7.2	3.6	11.7	5.2
2.0	6.6	2.5	8.2	4.1	13.4	4.0
0.3	1.0	0.4	1.3	0.6	2.0	173.1

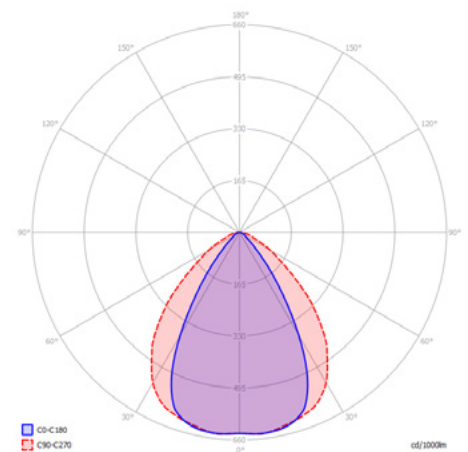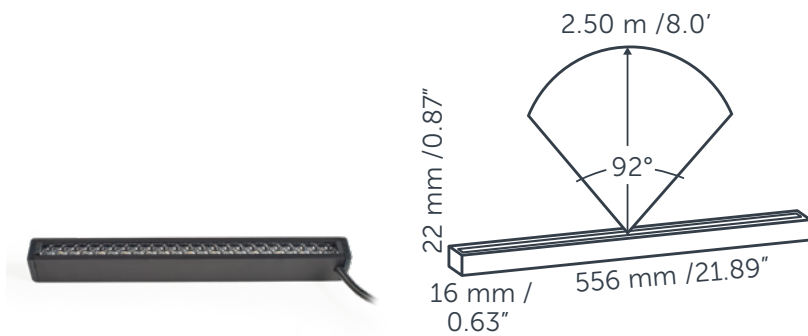

in-lite®

12 volt

